

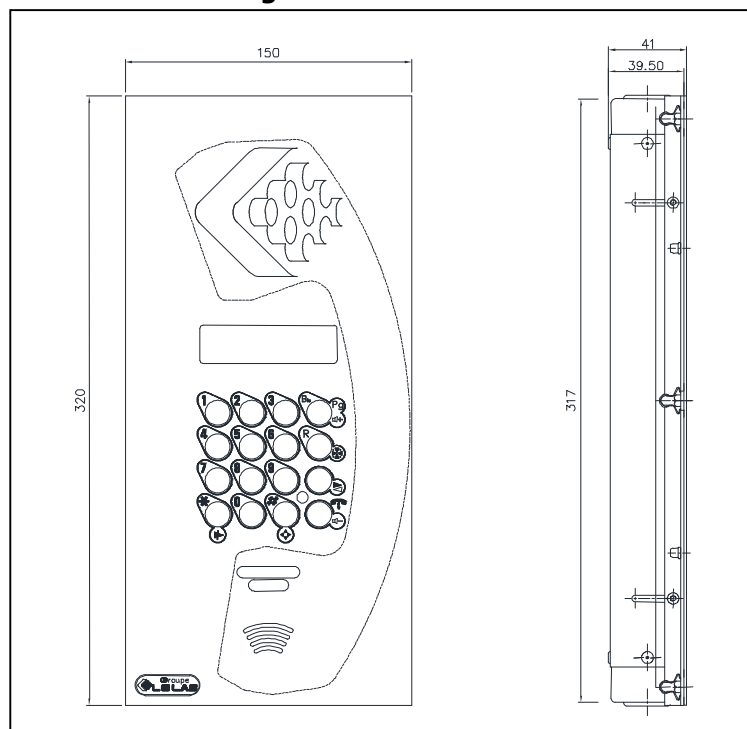
UK and International - INFOCOM SYSTEMS

Tel:.....(44) 1273 564343

Fax:(44) 1273 561319

E-mail:info@infocomsystems.co.uk

Web-site:www.infocomsystems.co.uk

**WEATHERPROOF TELEPHONE
FOR STERILE AREA
5 Watts / Keyboard 15 keys / Display**
TLS 250 S2 C9L
Dimensions Drawing


Front face material / Color:..... face adhesive polyester 200μ grained
white background serigraphy blue pantone 280
Box material / Color : stainless steel sheet
Microphone :electret
Loudspeaker :5 watts
Fixation :flush mounting
Connection :lockable and removable connector
Cable type :single son or stranded max section 1.5mm²
Cable entry :type for cable Ø15mm Max
Dimension :150 X 320 X 41mm (Box depth 39.50mm)
Weight :1.6 kg
Ingress Protection (IP) :IP65
Operating Temperature :-20°C / + 60°C

Recessed telephone box for clean rooms.
Waterproof on the front (IP65)
**Stainless steel front with silk screened polyester
adhesive side with integrated keypad.**
Electrical Characteristics

Line voltage :	20 à 60 Vcc
Walking consumption Max:	40mA±3
Resting consumption:	≤ 15μA
Ringing voltage :	30 – 80 Vac
Loudspeaker :	5W
Sound Call waiting :	≥80 dB / 1 m.
Talk mode :	hands free
Hang up :	automatic

Other characteristic: CCITT Q23

MTBF: 100 000 Hrs
(Mean time between failures)

Options:

- Flashing card
- Amplifier card
- Relay card
- Remote monitoring


Procedure for installation and maintenance :

- . Installation on partition / panel (thickness: 0.6 to 13mm, other thickness consult us).
- . Opening and closing of the front panel by clipping.
- . Waterproofing with silicone seal on the periphery of the front panel.
- . Connection of the line to board by connector, mono or stranded wires with a cross-section of up to 1.5 mm²

This equipment comes with a warranty of 2 years parts and labour on return to factory basis.